

OVIA



Bathroom & Kitchen Lighting



230V IP54 Angled Aluminium Wall Light

code	no. of lamps	lampholder type	max wattage
LE601AL	1	GX53	9W
C/W Selected Lamp			

Available Finishes



Aluminium

LED Colour Options (†)



2.7W
Blue



3W
Cool White


CFLi Colour Options (†)



9W
Cool White



9W
Warm White

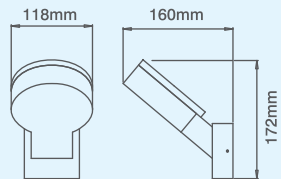

Product Approvals

Good protection against ingress of dust and moisture. Complies with BS EN 60598.

Please add lamp option on to the code e.g. **LE601ALLEDB**.


BATHROOM & KITCHEN - Surface Mounted Angled Aluminium Wall Light

OVIA



230V IP54 Angled Aluminium Wall Light

code	no. of lamps	lampholder type	max wattage
LE602AL↓	2	GX53	2 x 9W
C/W Selected Lamp			

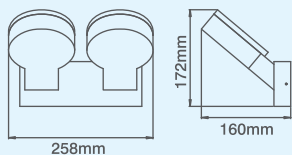

Available Finishes



Aluminium

LED Colour Options (↓)



2.7W
Blue



3W
Cool White

CFLi Colour Options (↓)



9W
Cool White



9W
Warm White

Product Approvals

Good protection against ingress of dust and moisture.
Complies with BS EN 60598.

Please add lamp option on to the code e.g. **LE602AL9C**.



230V Low Energy IP44 Wall Light

code	no. of lamps	lampholder type	max wattage
LE611CH♦	1	E14	15W
C/W Selected Lamp			

Available Finishes



Chrome

LED Colour Options (♦)




4W Warm White

CFLi Colour Options (♦)




11W Warm White

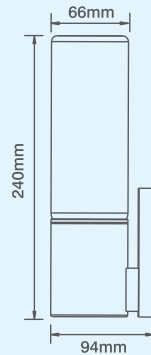

Product Approvals
Complies with BS EN 60598.

Please add lamp option on to the code e.g. **LE611CH4SWL**.

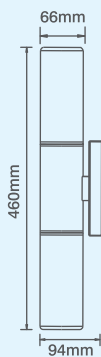

230V Low Energy IP44 Wall Light

code	no. of lamps	lampholder type	max wattage
LE612CH	2	E14	2 x 15W
C/W Selected Lamp			

Available Finishes



LED Colour Options (♣)

CFLi Colour Options (♣)




4W Warm White



11W Warm White

Product Approvals
Complies with BS EN 60598.

Please add lamp option on to the code e.g. **LE612CH11W**.

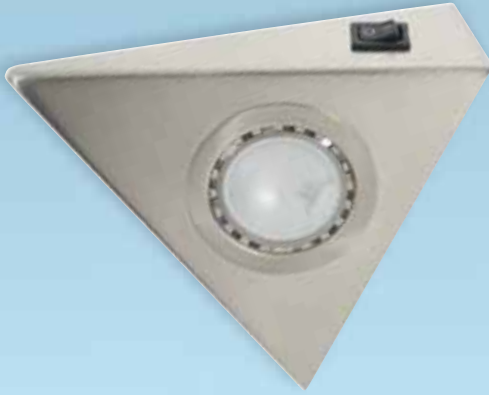

12V Undercupboard Surface Lights


code	no. of lamps	lampholder type	max wattage
LV210*	1	G4 Capsule	20W

LED Lamp Included, c/w 2m flex.

Low Voltage Transformers

The CLICK range of electronic low voltage transformers comprises a selection of pre-wired and wireable transformers in various styles and sizes to suit most applications. Full details can be found on page b211.

Available Finishes (*)

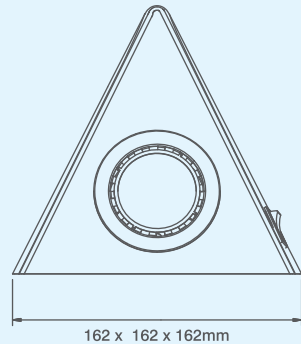


Product Approvals
SELV - Safety Extra Low Voltage
Complies with BS EN 60598.

Please add required finish on to the code e.g. **LV210WH**.

BATHROOM & KITCHEN - Surface Mounted Low Energy Undercupboard Light

OVIA

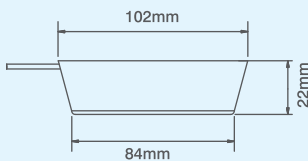

Product Approvals
Double insulated, no
earth connection required.
Complies with BS EN 60598.



240V Low Energy Undercupboard Lights

code	no. of lamps	lampholder type	max wattage
LE105*3SCL LED Lamp Included, c/w 2m flex.	1	GX53	13W
LE105* Lamp Not Included, c/w 2m flex.	1	GX53	13W

Available Finishes (*)

WH

White

CH

Chrome

SC


Satin Chrome

Lamp Options

3SCL

3W
SMD LED
Cool White


Please add required finish on to the code e.g. **LE105CH**.

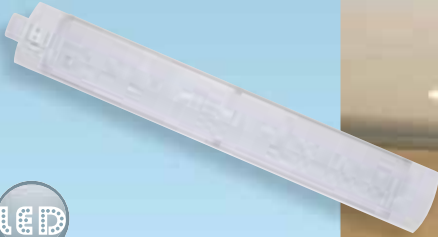

Product Approvals
Complies with BS EN 60598.

230V LED Striplight

Mounting Positions



I = 32mm



code

wattage

LED301WH

2.7W Integrated LED

Supply or link lead required. See Accessories listed below.
All our LED strip-lights can be connected end to end.

LED Colour Options (†)

Available Finishes



Blue



Cool White




White

230V LED Striplight

Mounting Positions



I = 32mm



code

wattage

LED302WH

3.6W Integrated LED

Supply or link lead required. See Accessories listed below.
All our LED strip-lights can be connected end to end.

LED Colour Options (†)

Available Finishes



Blue



Cool White



White

230V LED Striplight

Mounting Positions



I = 32mm



code

wattage

LED303WH

6.8W Integrated LED

Supply or link lead required. See Accessories listed below.
All our LED strip-lights can be connected end to end.

LED Colour Options (†)

Available Finishes



Blue



Cool White



White

Accessories

code

description

LED305WH

230V 1M LED Striplight Supply Lead

LED307WH

230V 0.25M LED Striplight Link Lead

LED308WH

230V 0.5M LED Striplight Link Lead

Please add lamp option in to the code e.g. **LED303BLWH**.



12V Undercupboard Flush or Surface Lights

code	no. of lamps	lampholder type	max wattage
LV130*	1	G4 Capsule	20W


Lamp Included, c/w 2m flex.

Low Voltage Transformers

The CLICK range of electronic low voltage transformers comprises a selection of pre-wired and wireable transformers in various styles and sizes to suit most applications. Full details can be found on page b211.

Available Finishes (*)


WH	CH	SC	BR	SB	AB
White	Chrome	Satin Chrome	Brass	Satin Brass	Antique Brass

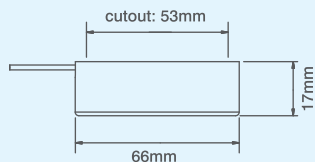

Product Approvals
SELV - Safety Extra Low Voltage
Complies with BS EN 60598.

Please add required finish on to the code e.g. **LV130SC**.

BATHROOM & KITCHEN - Flush or Surface Mounted
LED Undercupboard Light

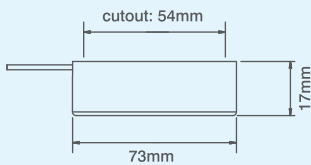

12V LED Undercupboard Flush or Surface Lights

code

wattage

LED130*
c/w 2m flex.

1W Integrated LED

LED Drivers

Full details can be found on page b211.

LED Colour Options (*)

Available Finishes (*)



Blue



Cool White



White



Chrome



Satin Chrome

Product Approvals
Complies with BS EN 60598.
Design Reg. 2106457



Please add lamp option then required finish on to the code e.g. **LED130BLSC**.

IP65

GF590 Bezel



IP65

GF590 Bezel



IP65

GF590 Bezel



IP65

GF495 Bezels




Product Approvals
* SELV - Safety Extra Low Voltage
Complies with BS EN 60598.



BATHROOM & KITCHEN - Flush Mounted Cast IP65 Downlighter




230V IP65 Frame C/W FLOW Connector



code	no. of lamps	lampholder type	max wattage
GZ096	1	GZ10/GU10	50W

Lamp sold separately.
Suitable for use with GF495 and GF590 Cast IP65 Profile Bezels.
See below for Bezel options.


230V LE IP65 Frame C/W FLOW Connector

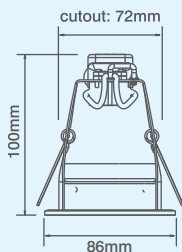

code	no. of lamps	lampholder type	max wattage
CF096	1	GU10	13W

Suitable for 76mm long lamps, lamp sold separately.
Suitable for use with GF495 and GF590 Cast IP65 Profile Bezels.
See below for Bezel options.

12V IP65 Downlight Frame *



code	no. of lamps	lampholder type	max wattage
LV096	1	GU5.3	50W

Lamp sold separately, for transformers see page b210.
Suitable for use with GF495 and GF590 Cast IP65 Profile Bezels.
See below for Bezel options.

Cast IP65 Profiled Bezel

code	description	diameter (mm)
GF495*	Cast IP65 Bezel	89
GF590*	Cast IP65 Profiled Bezel	89

Available Finishes (*)



White



Chrome



Satin Chrome



Brass

Please add required finish on to the code e.g. **GF495SC**.

